
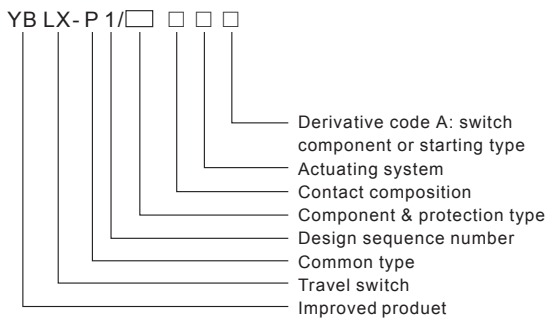


## YBLX-P1 Travel Switch

Contacting types

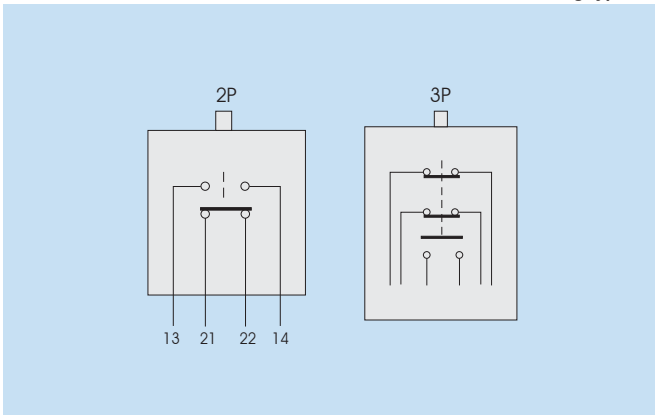

100	3-pole protective type travel switch (wide type)
120	3-pole protective type travel switch (narrow type)
303	3-pole protective type travel switch (wide type)
404	4-pole protective type travel switch (wide type)

	3P switch component	4P switch component
1	Normal slave contact 2NO, slave contact 1 NC	2 fast switch components
2	Cross slave contact 1 NO, 2 NC (a pair of cross)	2 cross switch components
3	Cross slave contact 1 NO, 2 NC (2 pairs of cross)	1 slave, 1 fast component
4	Cross slave contact 1 NO, 2 NC (2 pairs of cross)	
5	Cross slave contact 2 NO, 1 NC	

Model (recommended)	Operating mode	Substitution model (production stopped)		
YBLX-P1/120/1B	Direct-driven	YBLX-P1/120/0B		
YBLX-P1/120/1C	Direct-driven, buffering	YBLX-P1/120/0C		
YBLX-P1/120/1D	Direct driven, with single roller	YBLX-P1/120/0D		
YBLX-P1/120/1E	Direct-driven with single roller, buffering	YBLX-P1/120/0E		
YBLX-P1/120/1F	Lever, with single roller	YBLX-P1/120/0F		
YBLX-P1/120/1G	Angle of rotating arm adjustable, with single roller	YBLX-P1/120/1H YBLX-P1/120/0H YBLX-P1/120/0G	YBLX-P1/120/1J YBLX-P1/120/0J	YBLX-P1/120/1K YBLX-P1/120/0K

Model (recommended)	Operating mode	Substitution model (production stopped)		
YBLX-P1/120/1P	Length of iron lever adjustable, damping	YBLX-P1/120/1V YBLX-P1/120/0V YBLX-P1/120/0P	YBLX-P1/120/1W YBLX-P1/120/0W	YBLX-P1/120/1Q YBLX-P1/120/0Q
YBLX-P1/120/1R	Free-directions type	YBLX-P1/120/0R		
YBLX-P1/120/1T	No self-reset of roller	YBLX-P1/120/0T		
YBLX-P1/120/1U	Length of single lever adjustable, with single roller	YBLX-P1/120/0U	YBLX-P1/120/0N	YBLX-P1/120/0N
YBLX-P1/100/1B	Direct-driven	YBLX-P1/100/0B		
YBLX-P1/100/1C	Direct-driven, buffering	YBLX-P1/100/0C		
YBLX-P1/100/1D	Direct driven, with single roller	YBLX-P1/100/0D		
YBLX-P1/100/1E	Direct-driven with single roller, buffering	YBLX-P1/100/0E		
YBLX-P1/100/1F	Lever, with single roller	YBLX-P1/100/0F		
YBLX-P1/100/1G	Angle of rotating arm adjustable, with single roller	YBLX-P1/100/1H YBLX-P1/100/0H YBLX-P1/100/0G	YBLX-P1/100/1J YBLX-P1/100/0J	YBLX-P1/100/1K YBLX-P1/100/0K
YBLX-P1/100/1P	Length of iron lever adjustable, damping	YBLX-P1/100/1V YBLX-P1/100/0V YBLX-P1/100/0P	YBLX-P1/100/1W YBLX-P1/100/0W	YBLX-P1/100/1Q YBLX-P1/100/0Q
YBLX-P1/100/1R	Free-directions type	YBLX-P1/100/0R		
YBLX-P1/100/1T	Length of single lever adjustable, with single roller	YBLX-P1/100/0T		
YBLX-P1/100/1U	Direct-driven	YBLX-P1/100/0U	YBLX-P1/100/0N	YBLX-P1/100/0N
YBLX-P1/303/1B	Direct-driven, buffering	YBLX-P1/303/0B		
YBLX-P1/303/1C	Direct driven, with single roller	YBLX-P1/303/0C		
YBLX-P1/303/1D	Direct-driven with single roller, buffering	YBLX-P1/303/0D		
YBLX-P1/303/1E	Lever, with single roller	YBLX-P1/303/0E		
YBLX-P1/303/1F	Angle of rotating arm adjustable, with single roller	YBLX-P1/303/0F		
YBLX-P1/303/1G	Length of single lever adjustable, with single roller	YBLX-P1/303/1H YBLX-P1/303/0H YBLX-P1/303/0G	YBLX-P1/303/1J YBLX-P1/303/0J	YBLX-P1/303/1K YBLX-P1/303/0K
YBLX-P1/303/1P	Length of iron lever adjustable, damping	YBLX-P1/303/1V YBLX-P1/303/0V YBLX-P1/303/0P	YBLX-P1/303/1W YBLX-P1/303/0W	YBLX-P1/303/1Q YBLX-P1/303/0Q
YBLX-P1/303/1R	Free-directions type	YBLX-P1/303/0R		
YBLX-P1/303/1T	No self-reset of roller	YBLX-P1/303/0T		
YBLX-P1/303/1U	Length of single lever adjustable, with single roller	YBLX-P1/303/0U		
YBLX-P1/404/1B	Direct-driven	YBLX-P1/404/0B		
YBLX-P1/404/1C	Direct-driven, buffering	YBLX-P1/404/0C		
YBLX-P1/404/1D	Direct driven, with single roller	YBLX-P1/404/0D		

Model (recommended)	Operating mode	Substitution model (production stopped)		
YBLX-P1/404/1E	Direct-driven with single roller, buffering	YBLX-P1/404/0E	YBLX-P1/120/1W	YBLX-P1/120/1Q
YBLX-P1/404/1F	Lever, with single roller	YBLX-P1/404/0F	YBLX-P1/120/0W	YBLX-P1/120/0Q
YBLX-P1/404/1G	Length of single lever adjustable, with single roller	YBLX-P1/404/1H YBLX-P1/404/0H YBLX-P1/404/0G	YBLX-P1/404/1J YBLX-P1/404/0J	YBLX-P1/404/1K YBLX-P1/404/0K
YBLX-P1/404/1P	Length of iron lever adjustable, damping	YBLX-P1/404/1V YBLX-P1/404/0V YBLX-P1/404/0P	YBLX-P1/404/1W YBLX-P1/404/0W	YBLX-P1/404/1Q YBLX-P1/404/0Q
YBLX-P1/404/1R	Free-directions type	YBLX-P1/404/0R		
YBLX-P1/404/1T	No self-reset of roller	YBLX-P1/404/0T		
YBLX-P1/404/1U	Length of single lever adjustable, with single roller	YBLX-P1/404/0U		

Rated operational voltage (V)	AC380V DC220V
Rated power	AC300VA DC60W
Conventional heating current (A)	10
Protection degree	IP65
Mechanical life (operations)	$30 \times 10^5$
Electric life (operations)	$I_e = 1A/AC-15: 5 \times 10^5$
	$I_e = 0.5A/DC-13: 10 \times 10^5$
Environmental temperature	$-25^{\circ}\text{C} \sim +40^{\circ}\text{C}$
Relative humidity	$\leq 95\%$
Altitude	$\leq 2000\text{m}$
Application	Automatic control, limitation operation, operation of transmission mechanism and program control of machine tool.

