


## RT28(RT18)series fuse isolator


### Application range

RT28 type cylinder cap fuse can be applied in power distribution devices with rated voltage up to AC 380V, and rated current up to 63A to protect the devices from overload and short-circuit. The fuse-link's blowing signal device (code "X") of isolator is composed of Neon lamp and resistance.

### Type and meaning

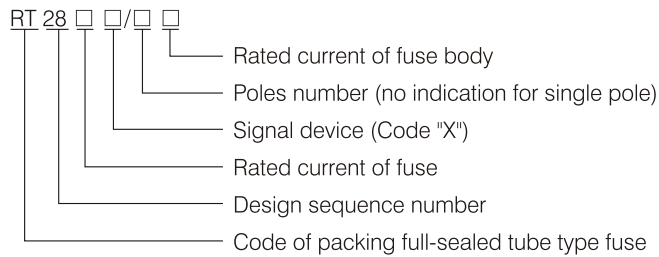

### Overall figure and installation dimension

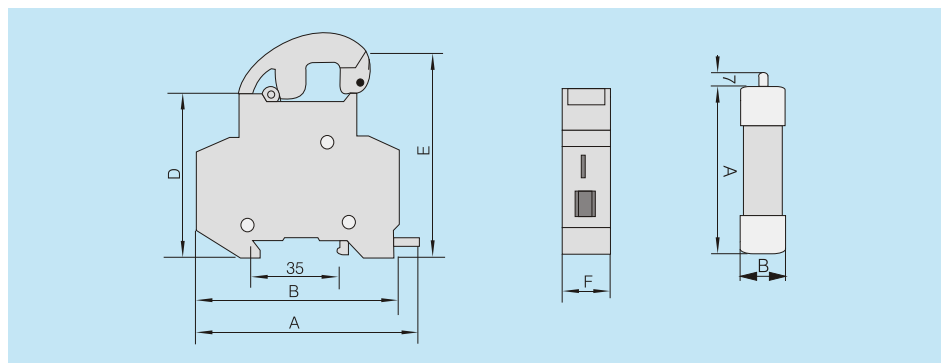

Type	Rated current of fuse body	Dimension					Weight (kg)
		A	B	D	E	F	
RT18-32	2, 4, 6, 10, 16, 20, 25, 32	82	78	60	77	18	0.075
RT18-32X	2, 4, 6, 10, 16, 20, 25, 32	82	78	60	77	18	0.075
RT18-63	2, 4, 6, 10, 16, 20	106	103	80	110	26	0.18
RT18-63X	25, 32, 40, 50, 63	106	103	80	110	26	0.18